



Corner Crack Monitor

Date of Reading: _____

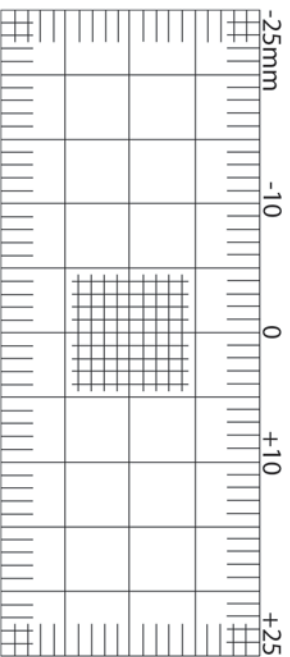


Distance Between Spigots: _____ mm

Date of Reading: _____

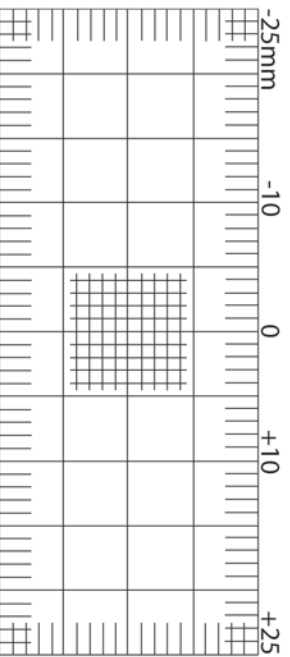


Distance Between Spigots: _____ mm

Date of Reading: _____

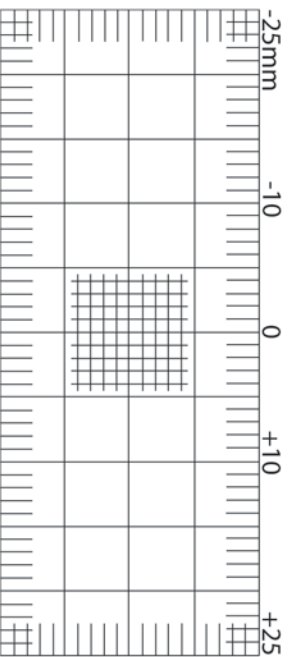

Distance Between Spigots: _____ mm

Date of Reading: _____

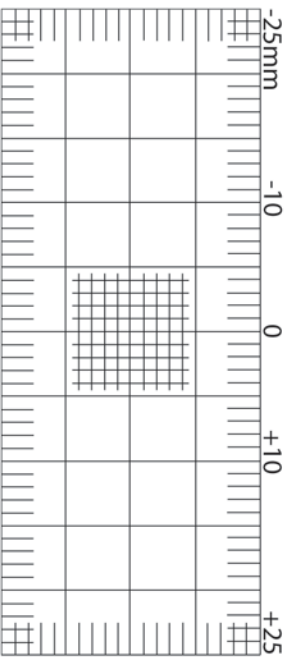

Distance Between Spigots: _____ mm




Project _____

Location of Monitor _____

During each monitoring event, indicate on the diagrams below, the movement of the crack monitor. This should be done after the crack widths have been measured using the crack width gauge.


- + represents crack opening on horizontal scale
- represents crack closing on horizontal scale

Date of Reading: _____

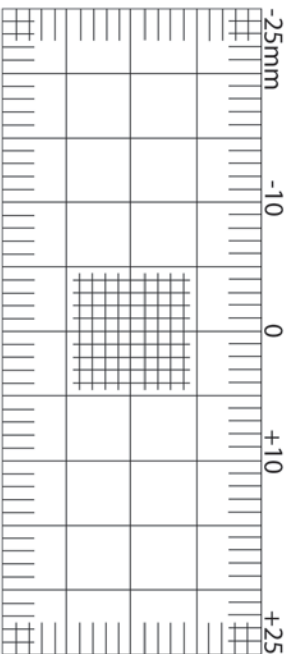

Distance Between Spigots: _____ mm

Date of Reading: _____

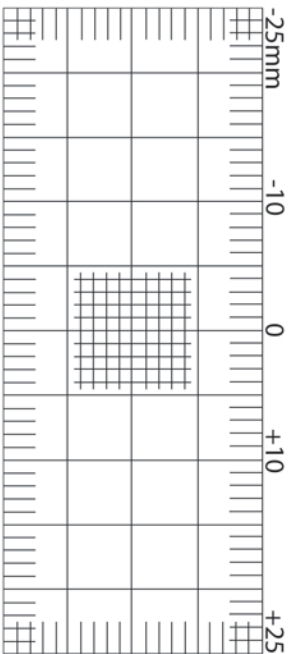

Distance Between Spigots: _____ mm

