



Standard Crack Monitor

Date of Reading: _____

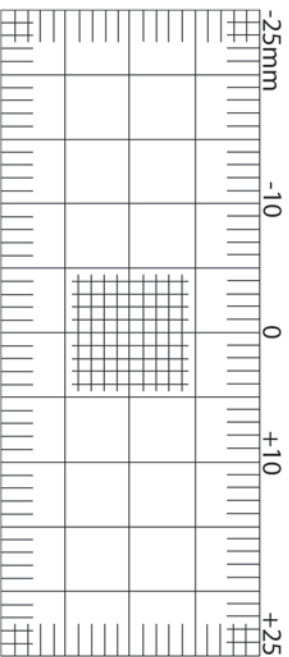


Distance Between Spigots: _____ mm

Date of Reading: _____

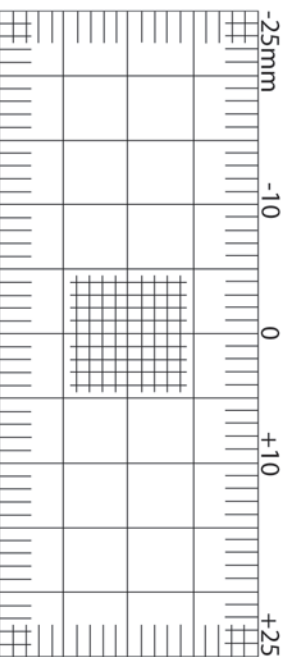


Distance Between Spigots: _____ mm

Date of Reading: _____

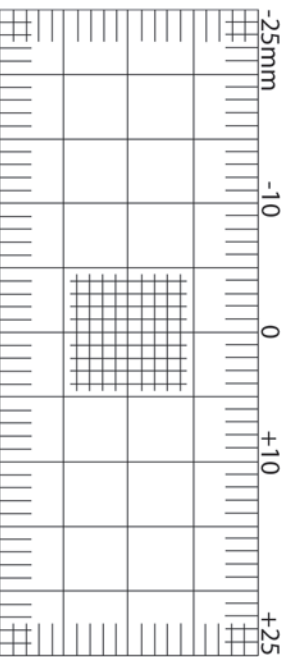

Distance Between Spigots: _____ mm

Date of Reading: _____

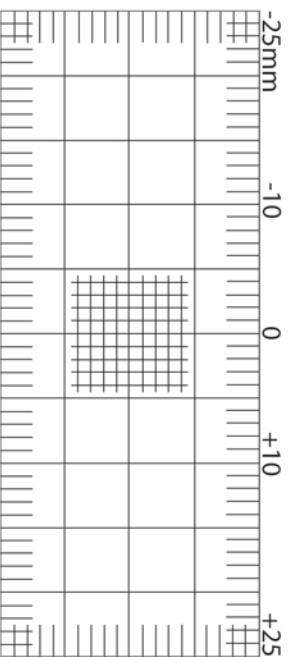

Distance Between Spigots: _____ mm




Project _____

Location of Monitor _____

During each monitoring event, indicate on the diagrams below, the movement of the crack monitor. This should be done after the crack widths have been measured using the crack width gauge.


- + represents crack opening on horizontal scale
- represents crack closing on horizontal scale

Date of Reading: _____

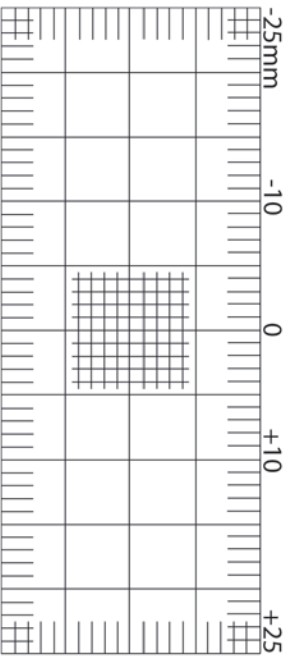


Distance Between Spigots: _____ mm

Date of Reading: _____

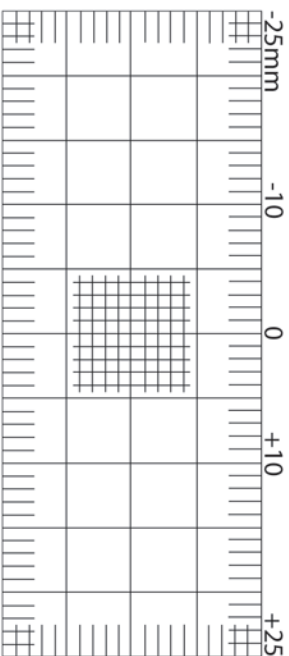

Distance Between Spigots: _____ mm

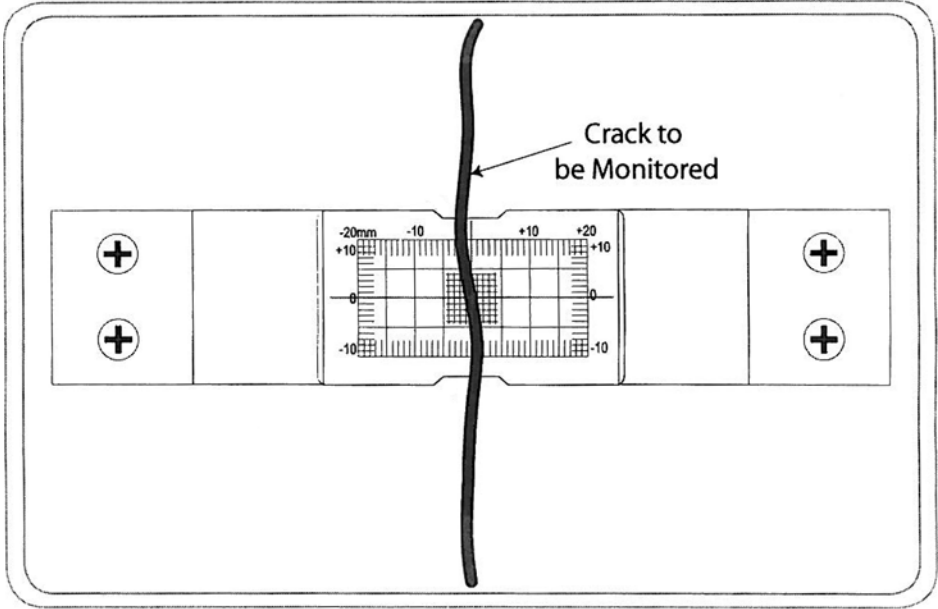

Fixing Instructions

1. Fix the Crack Monitor over the crack with the vertical zero line on the calibration scale parallel with the crack to be monitored.
2. Ensure that the numbers on the scale are positioned correctly.
3. Use screws and adhesive to fix
3. Remove the two pre-set pegs
4. If the crack opens or closes the cursor moves relative to the calibration scale.
The opening or closing of the crack can then be recorded on the record sheet on the reverse of these instructions.

Humboldt Mfg. Co.

875 Tollgate Road
Elgin, Illinois 60123 U.S.A.

U.S.A. Toll Free: 1.800.544.7220

Voice: 1.708.456.6300

Fax: 1.708.456.0137

Email: hmc@humboldtmg.com

Testing Equipment for



Construction Materials

HUMBOLDT

www.humboldtmg.com